


# WCS - OB

## Inclined undriven roller conveyor

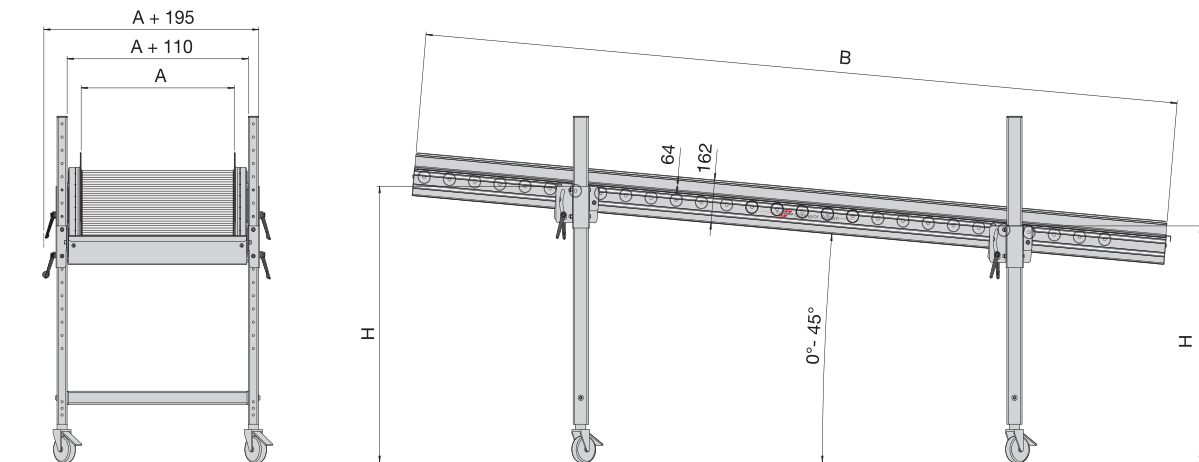

Dimensions	A	B	H
Min.	405	2 000	700
Max.	805	6 000	1 200

Standard model:

Widths: 400, 500, 600, 800 mm.

Lengths: 2 000 to 6 000 mm in intervals of 500 mm.

Support legs with lockable wheels.

Adjustable support legs for belt heights of 700-1 200 mm.

Non-driven rollers, Ø 50 mm, center distance rollers: 90 mm

Transport weight max. 50 kg/m.

Frame in sturdy anodised aluminium profile with integrated cable channel.

Lateral edges, height 60 mm on both sides. Easy to dismantle.

