


WCS-VL/ZL

VL-Inclined slatted belt conveyor with one angle

ZL-Inclined slatted belt conveyor with two angles

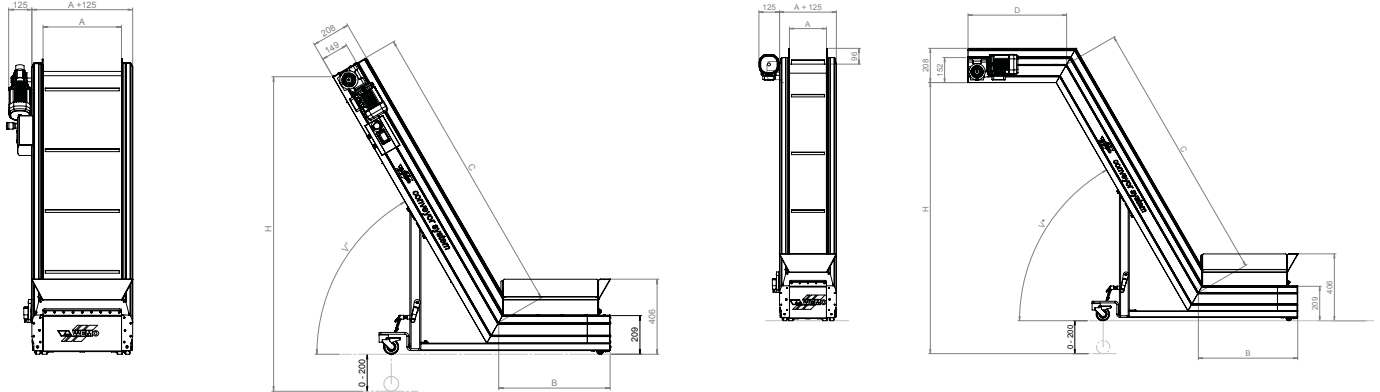

Dimensions	A	B	C	D	H45/H60
Min.	220	600	500	600	1 190/1 445
Max.	820	4 000	3 000	2 000	1 810/2 170

Standard version:

A= Belt widths.

B= Lower horizontal belt length.

C= Inclined belt length.

D= Upper horizontal belt length, (only for ZL-version).

H= Height for gradient (H45=45°, or H60=60°).

V= Gradient angle fixed (45°, or 60°).

Front support legs with lockable wheels and easy height adjustment.

Drive: AC motor, 0.12 kW, 400V, 50 Hz.

Maintenance-free worm gear and integrated adjustable slide coupling.

Motor switch with emergency stop function.

Belt speed: 5 m/min.

Frame made of hard-wearing anodised aluminium profile with integrated slide strips.

Plastic slatted belt made of hard-wearing polypropylene (PP), withstands temperatures up to 130°C.

Carrier height 25 mm, standard spacing 406 mm.

Lateral edges: 60 mm.